

# THE PHASE RULE

- I. Number of components, number of phases, number of degrees of freedom.
- II. The phase rule and its derivation.
- III. Application of the phase rule in one-component systems.
- IV. Phase changes and their detection methods.
- V. Application of the phase rule in two-component systems.
- VI. Application of the phase rule in three-component systems.

# I. Number of components, phases and degrees of freedom.


2

- **Phase (P)**: a macroscopic part of a system which shows identical properties everywhere. It may be composed of several *components* (e.g.:  $\text{NH}_3$  gas, water–hydrochloric acid, air, iron ore ...).
- **Component (C)**: the **minimal** number of **independent** types of substances (*elements, compounds, ions*) necessary to give the compositions of **all phases**.
  - ▣ In non-reactive system, the concept is simple, more demanding in reactive multiphase systems.
  - ▣ **Substance: every** chemical present.
- **Degree of freedom (F)**: the number of intensive physical properties whose values can be changed externally without changing the number of phases in the system.

# I. Number of components, phases and degrees of freedom.

3

**A system containing hydrogen, oxygen and water**  
(example calculation for the number of components):

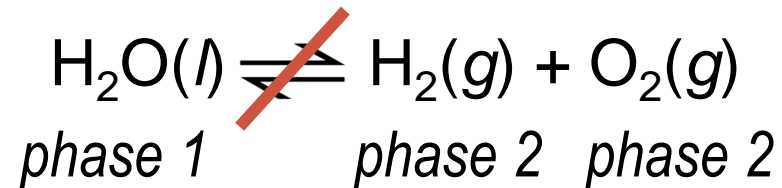


- Three substances ( $\text{O}_2$ ,  $\text{H}_2$  and  $\text{H}_2\text{O}$ ) and two phases (liquid and gas,  **$P = 2$** ) are present.
- At room temperature,  $\text{O}_2$  and  $\text{H}_2$  do not react, water does not decompose.
- Therefore, this is a three-component system ( **$C = 3$** ).

# I. Number of components, phases and degrees of freedom.

4

## Heating of solid calcium carbonate

(example calculation for the number of components):

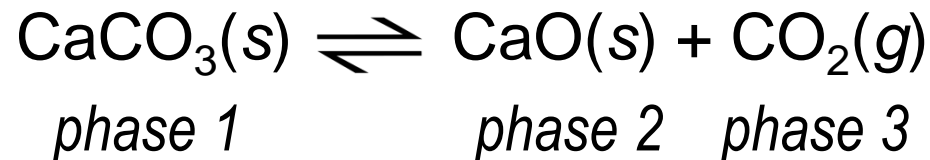


- If the composition of *phase 3*,  $\text{CO}_2(\text{g})$ , is known,
- and the composition of *phase 2*,  $\text{CaO}(\text{s})$ , is also known,
- then the combination of these two gives exactly the composition of *phase 1* through stoichiometry.
- Therefore, this system is characterized by
  - ▣ three *phases* (**P = 3**),
  - ▣ but two *components* (**C = 2**) although there are three *substances*.

# I. Number of components, phases and degrees of freedom.

5

## Thermal degradation of solid ammonium chloride

(example calculation for the number of components):

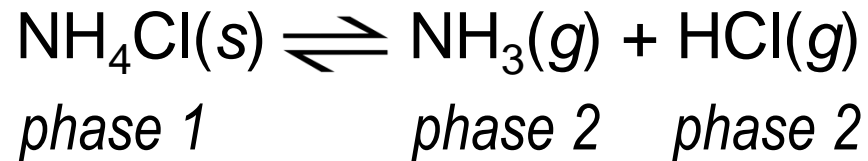


- Three *substances* and two *phases* (solid and gas, **P = 2**) are present.
- Ammonia and hydrogen chloride gases are present in exactly the ratio set by the stoichiometry of the chemical equation (1:1),
- so the compositions of both phases can be given by the single substance  $\text{NH}_4\text{Cl}$  (**C = 1**).

# Josiah Willard Gibbs

(1839 – 1903)

6

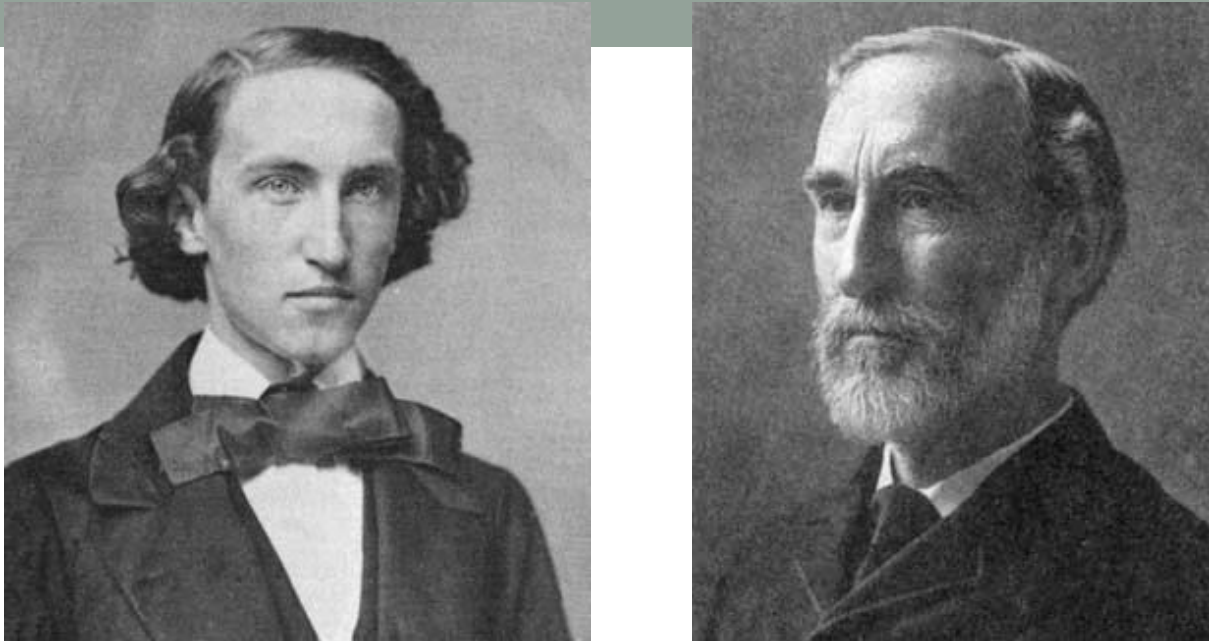

Commentators and biographers have remarked on the contrast between Gibbs's quiet, solitary life in turn of the century New England and the great international impact of his ideas. Though his work was almost entirely theoretical, the practical value of Gibbs's contributions became evident with the development of industrial chemistry during the first half of the 20th century. According to Robert A. Millikan, in pure science, Gibbs "did for statistical mechanics and for thermodynamics what Laplace did for celestial mechanics and Maxwell did for electrodynamics, namely, made his field a well-nigh finished theoretical structure."

# II. The phase rule and its derivation


7

- **Intensive properties:**  $p$ ,  $T$  and  $x_j$  mole fractions.
- Giving the composition of phases needs  $C-1$  mole fractions.
- In  $P$  phases,  $P(C-1)$  mole fractions are needed, so there are  $P(C-1)+2$  variables.
- In equilibrium, for each component  $J$ :
  - ▣  $\mu_{J,\alpha} = \mu_{J,\beta} = \dots$  in  $P$  phases, which means  $P-1$  equations for each component.
  - ▣ For  $C$  components, there are  $C(P-1)$  equations.
- Each such equation decreases the number of freely modifiable intensive properties, originally  $P(C-1)+2$ .
- So the number of degrees of freedom:

$$F = [P(C - 1) + 2] - C(P - 1) = C - P + 2$$

# III. Application of the phase rule in one-component systems

8

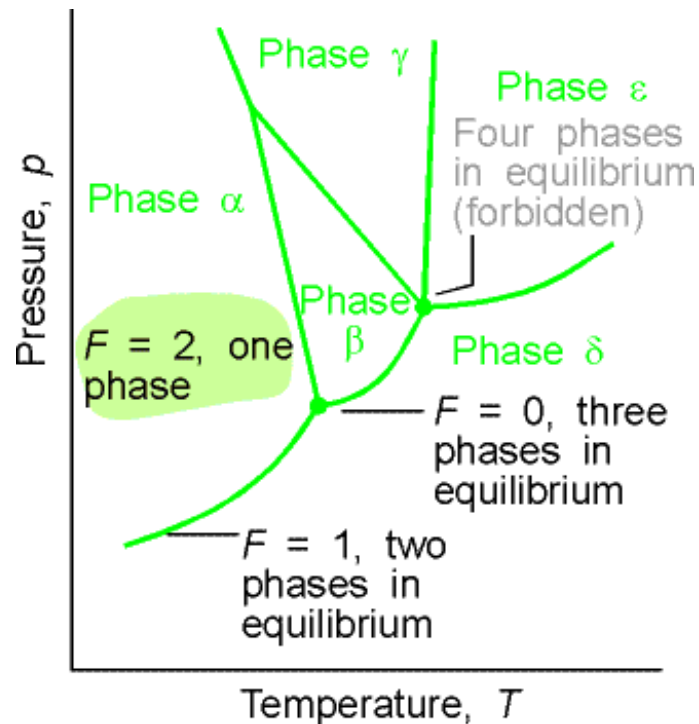

## One-component systems ( $C = 1$ ):


- in areas:  $F = 1 - 1 + 2 = 2$ 
  - ▣ Both  $T$  and  $p$  are freely modifiable.
- on lines:  $F = 1 - 2 + 2 = 1$ 
  - ▣ Either  $T$  or  $p$  is freely modifiable.
- in a triple point:  $F = 1 - 3 + 2 = 0$ 
  - ▣ Characteristic constants.
- Four phases cannot be present in equilibrium!

$$F = C - P + 2$$



# IV. Phase changes and their detection


9

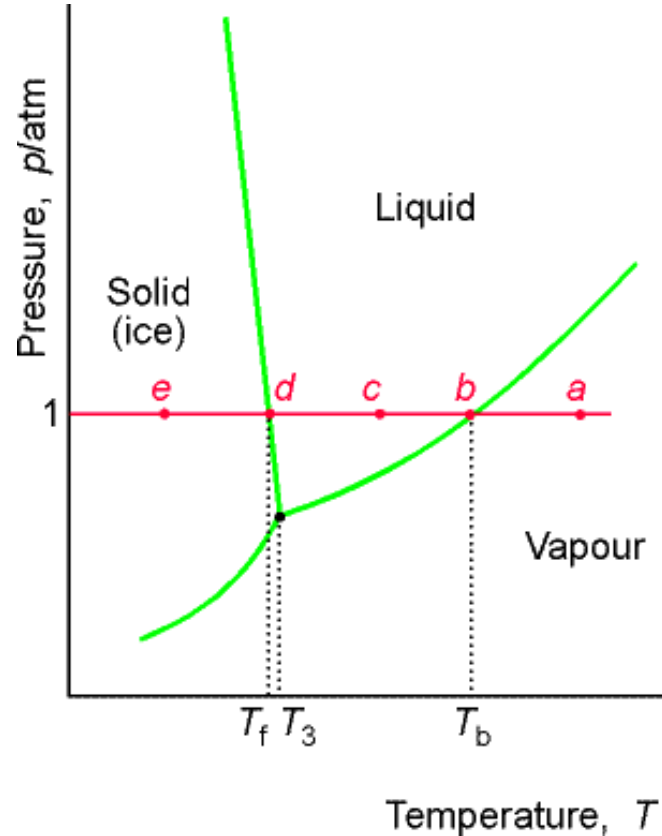

- Upon increasing  $T$  ( $p = \text{constants}$ ):
  - ▣ Gas ( $a$ )  $\rightarrow$  liquid ( $c$ )  $\rightarrow$  solid ( $e$ ) transition detectable.
  - ▣ In point  $b$  ( $T_b$ ), boiling or condensation occurs.
  - ▣ In point  $d$  ( $T_f$ ), melting or freezing occurs.
  
- It is possible to monitor changes along a single vertical line (so that  $T = \text{constant}$ ).

# IV. Phase changes and their detection

10

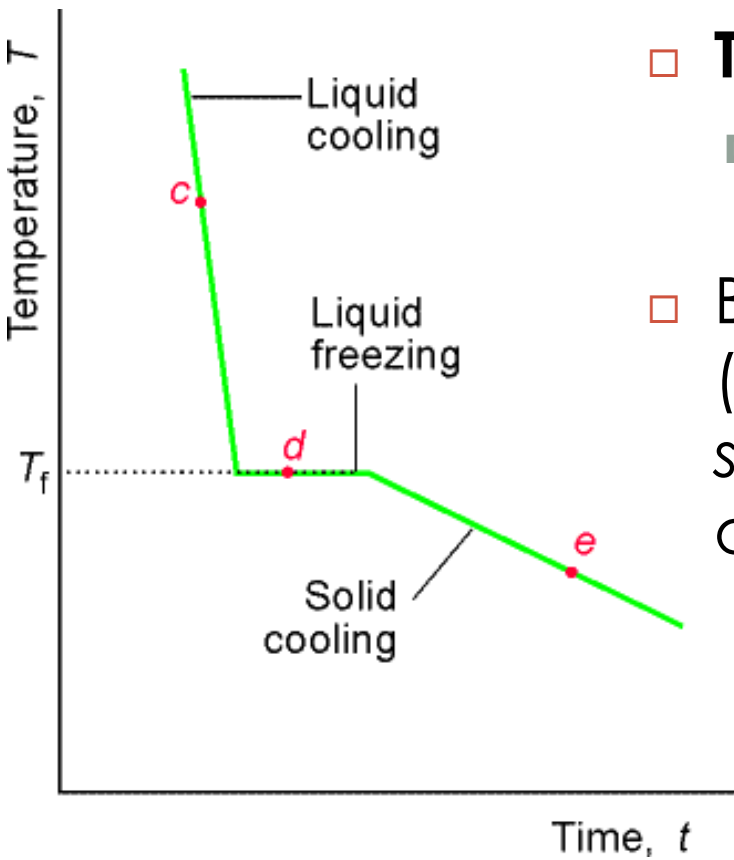

- The  $g \rightarrow l$  or  $s \rightarrow l$  transition is easy to detect (and measured through the melting or freezing point).
- **Thermal analysis:**
  - ▣ a favorable method to measure the enthalpy of phase transition.
- Based on the **cooling curve** (measured at constant pressure), an  $s_\alpha \rightarrow s_\beta$  phase transition (not usually observed easily) can also be studied.

# V. Application of the phase rule in two-component systems

11


## Liquid-liquid phase diagrams

□  $C = 2$ , so  $F = 2 - P + 2 = 4 - P$

$F' = 3 - P$

□ Keep one of the degrees of freedom constant ( $p$  or  $T$ ):

- Change  $p$  and  $x_j$  (keep  $T$  constant): (vapor) pressure-composition diagram.
- Change  $T$  and  $x_j$  (keep  $p$  constant): temperature-composition diagram.

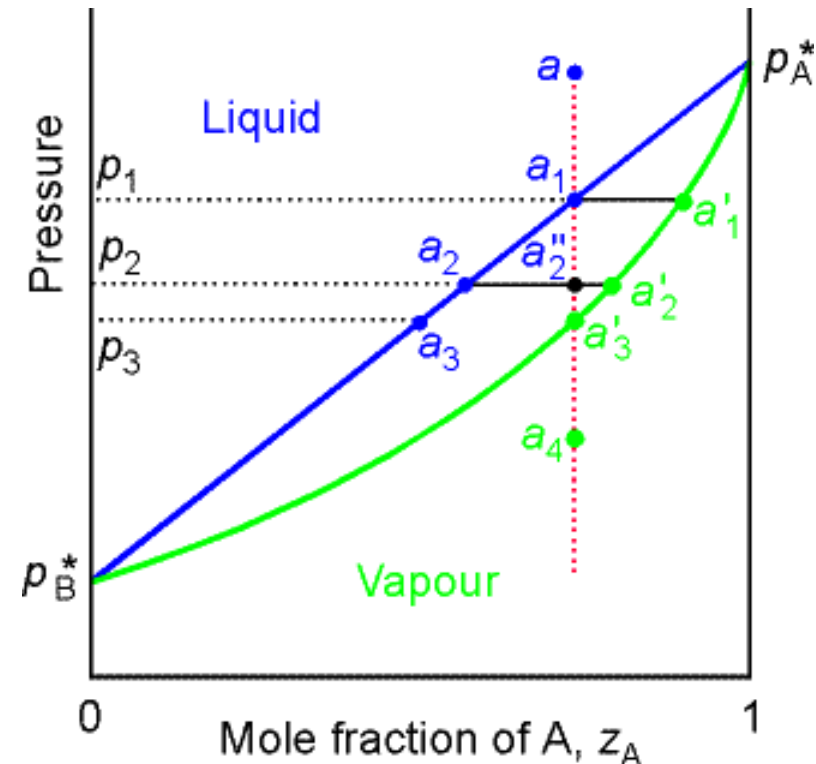

# V. Application of the phase rule in two-component systems


12

- Interpretation of diagrams: combination
- The change of the state of the system in response to pressure decrease at composition a:  **$F' = 3 - P$**

- Vertical line: **isopleth**

- Pressure decrease:

- ▣ high  $p \Rightarrow$  only  $l$ ,
- ▣ intermediate  $\Rightarrow$   $l$  and  $g$ ,
- ▣ low  $p \Rightarrow$  only  $g$ .

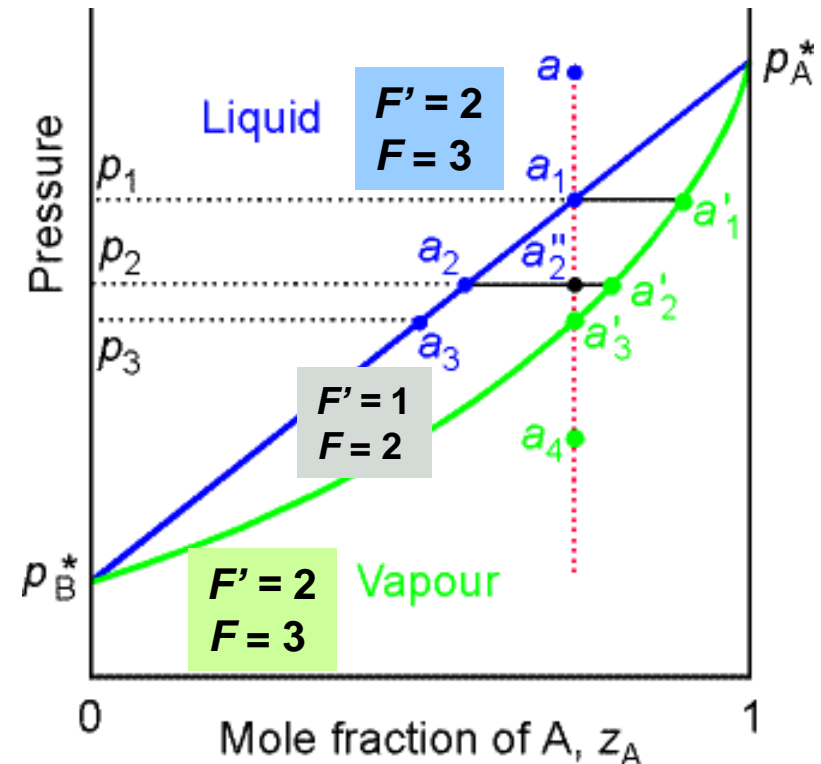

$z_A$ : the generic mole fraction of substance A in the system


# V. Application of the phase rule in two-component systems

13

- Temperature–composition ( $T$ – $z$ ) diagrams, distillation

$$F' = 3 - P$$

- increase in temperature while the other intensive property is kept constant.

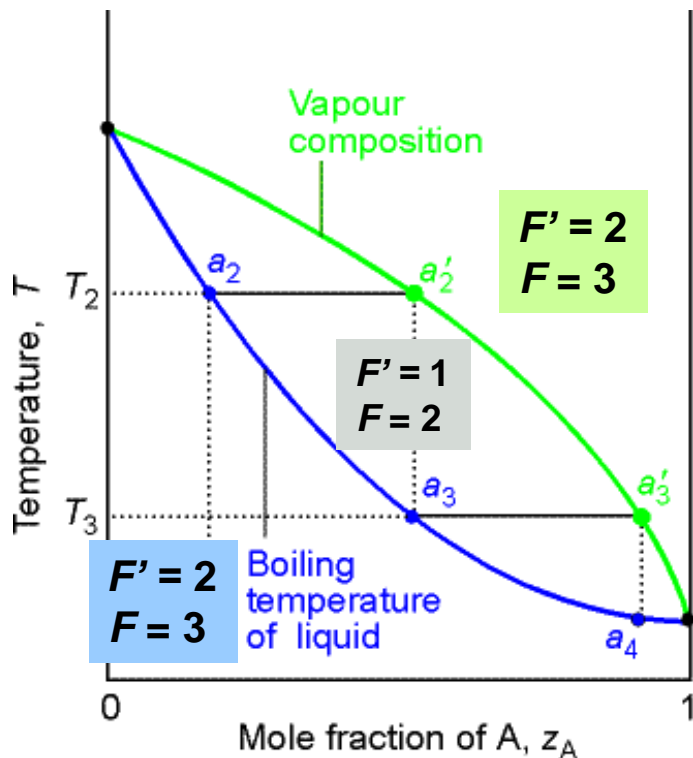


- A is more volatile than B.
  - **Single-step:** the equilibrium valid at  $T$  is established, the vapor is rich in A, it is condensed.
  - **Multistep:** the vapor is getting gradually richer in A, increasingly pure condensate is obtained (fractional distillation).

# V. Application of the phase rule in two-component systems

14

## Liquid-solid phase diagrams

- Two immiscible metals.
- The phase diagram is similar to the previous one, but now  $l$  and  $s$  occur in it.
- Upon cooling:
  - ▣ initially ( $a_1$ ):  $C = 2$ ,  $P = 1$
  - ▣ at  $a_2$   $l$  and  $B(s)$ , so  $P = 2$
  - ▣ at  $a_3$ :  $P = 2$ , lever rule
  - ▣ from  $a_4$ :  $P = 2$ , pure A and B

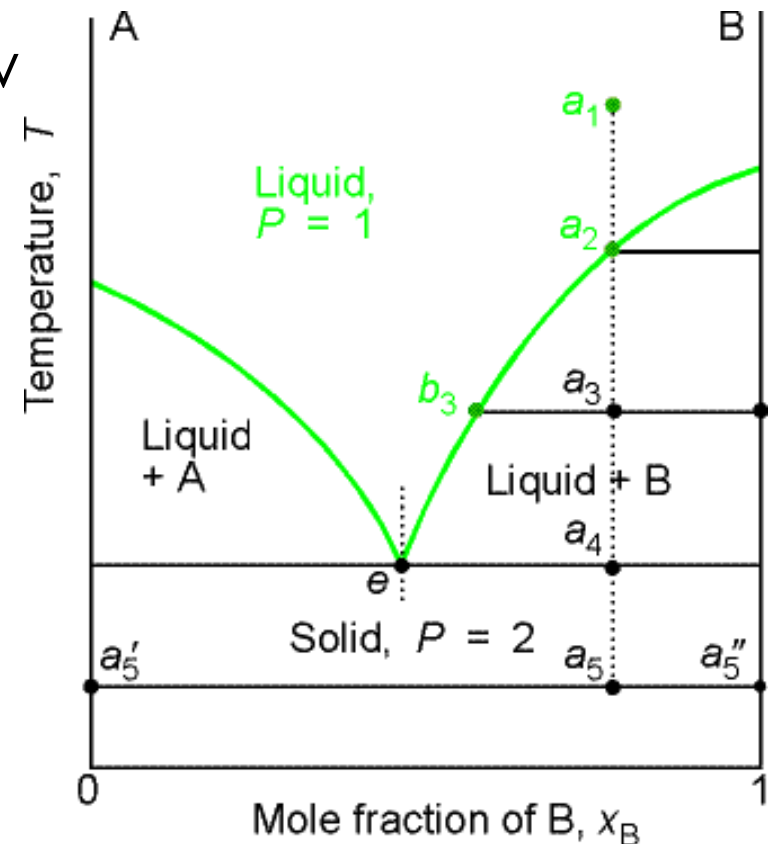

# V. Application of the phase rule in two-component systems

15

Eutectics („easily melting“): at composition  $e$

□ the composition of  $l$  and  $s$  is the same

$$F' = 3 - P$$

□ lowest  $T_{\text{fus}}$

□ only composition with a definite freezing point


□ neither A nor B form

□  $F = 0$  if  $C = 2$  and  $P = 3$

□ huge practical importance

▣ 67s% Sn + 33s% Pb: 183 °C  
(tin solder)



▣ 23s% NaCl + 77s% water:  
-21 °C

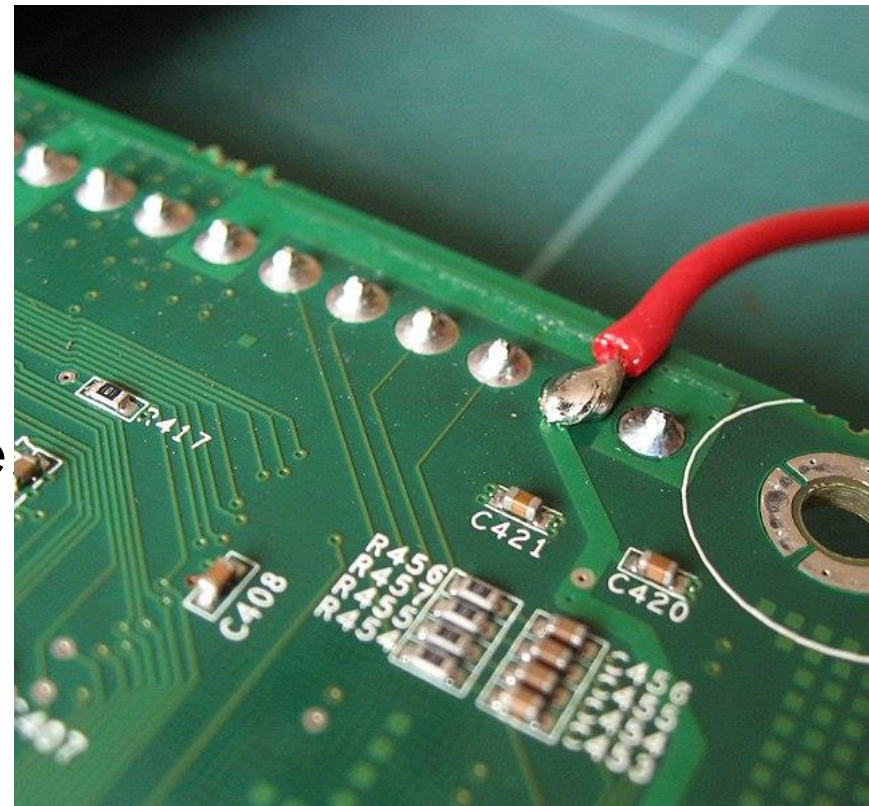

# V. Application of the phase rule in two-component systems

16

- **Thermal analysis: cooling curves** measured.
- At eutectic compositions, there is only one break point: **eutectic halt!**

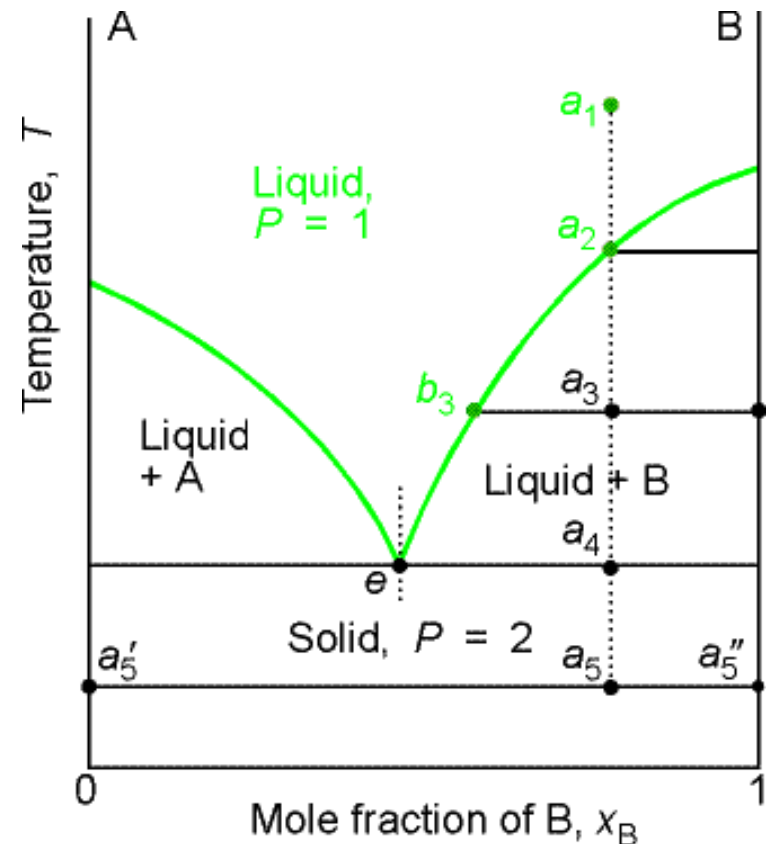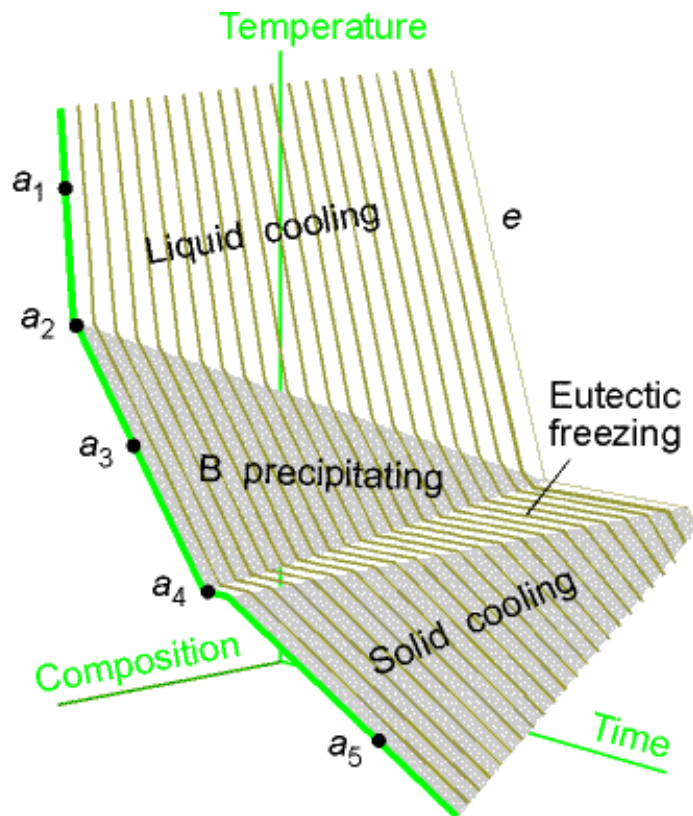




# V. Application of the phase rule in two-component systems

17

Preparation of **ultrapure substances**, **controlled amounts of impurities**:

- In some technologies, highly pure substances are needed or the presence of exactly known amounts of „impurities” (dopants), e.g. semiconductor industry.
- These can be prepared by **fractional crystallization**, but this is slow and expensive.

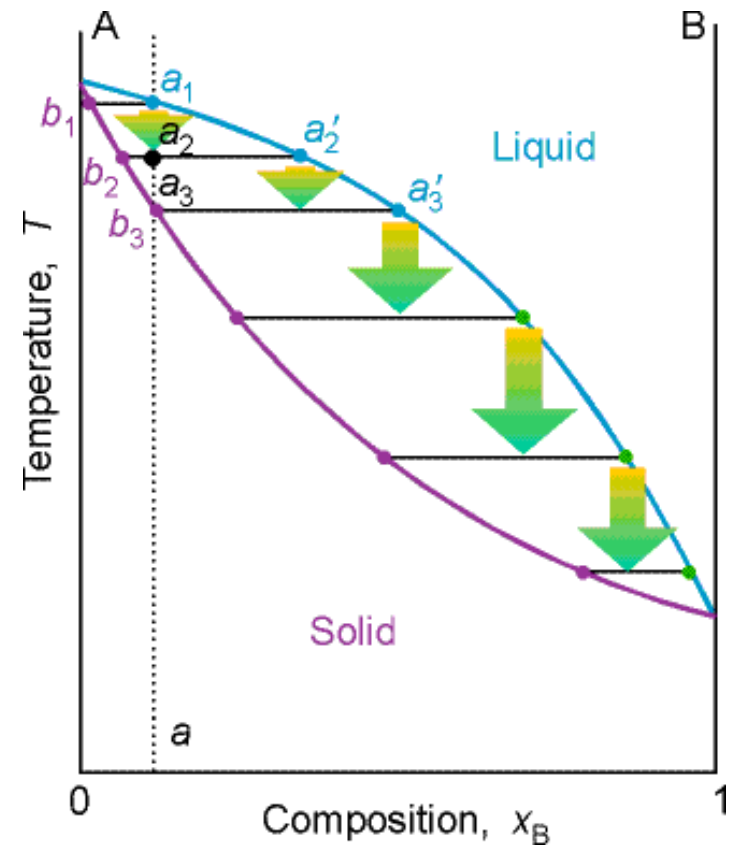


# V. Application of the phase rule in two-component systems

18

Preparation of **ultrapure substances**, **controlled amounts of impurities**:

- In some technologies, highly pure substances are needed or the presence of exactly known amounts of „impurities” (dopants), e.g. semiconductor industry.
- **Purification by zone melting:** the impurity dissolves in the melt better than in the liquid.
- A melt zone travels through the rod-shaped sample – lots of times.

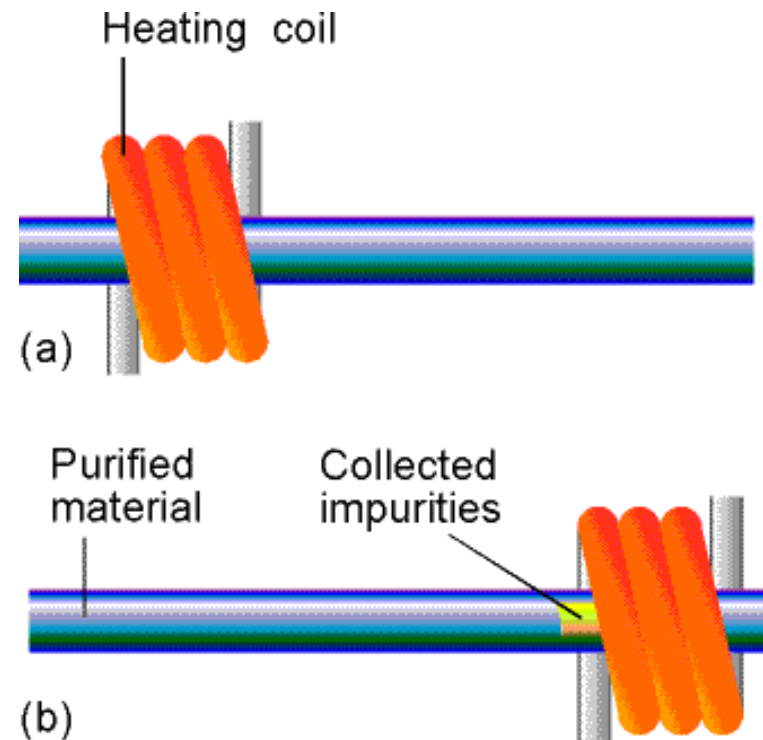

# VI. Application of the phase rule in three-component systems

19

- The phase rule:  $F = 3 - P + 2 = 5 - P$ , so the number of degrees of freedom may be up to 4.
- If  $p$  and  $T$  are constant, the mole fractions of two components can still be modified.
  - ▣ **Triangle phase diagrams:** no  $p$  or  $T$  axis, all 3 axes are for composition.
  - ▣ Experimental information is essential.
  - ▣ Valid only at the given  $p$  and  $T$ .


# VI. Application of the phase rule in three-component systems

20

**Triangle phase diagrams:** no  $p$  or  $T$  axis, all 3 axes are for composition.

Experimental information is essential.

Only valid at the given  $p$  and  $T$ .

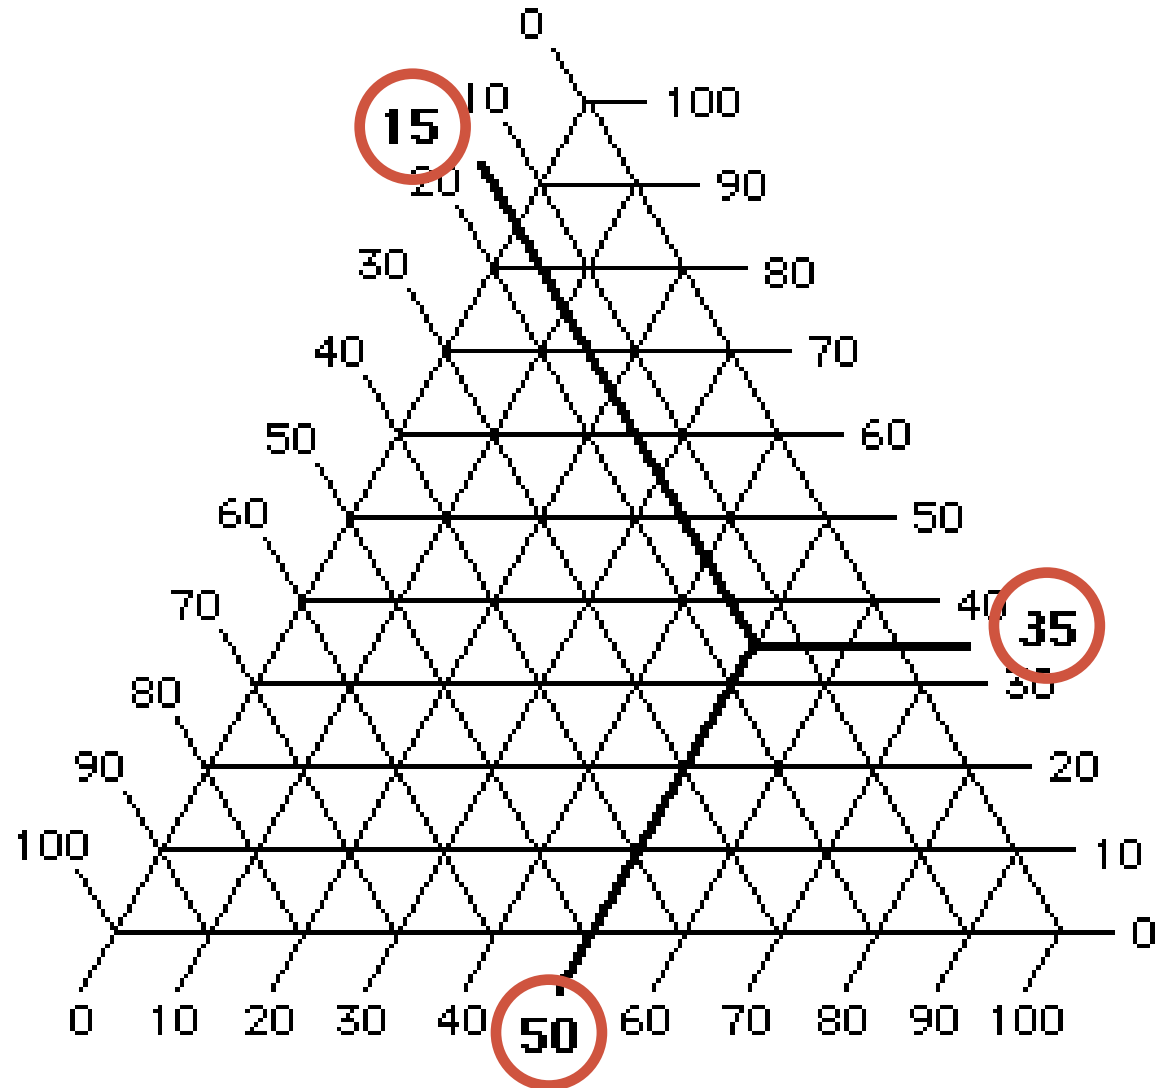


# VI. Application of the phase rule in three-component systems

21

**Triangle phase diagrams:** no  $p$  or  $T$  axis, all 3 axes are for composition.

Experimental information is essential.

Only valid at the given  $p$  and  $T$ .

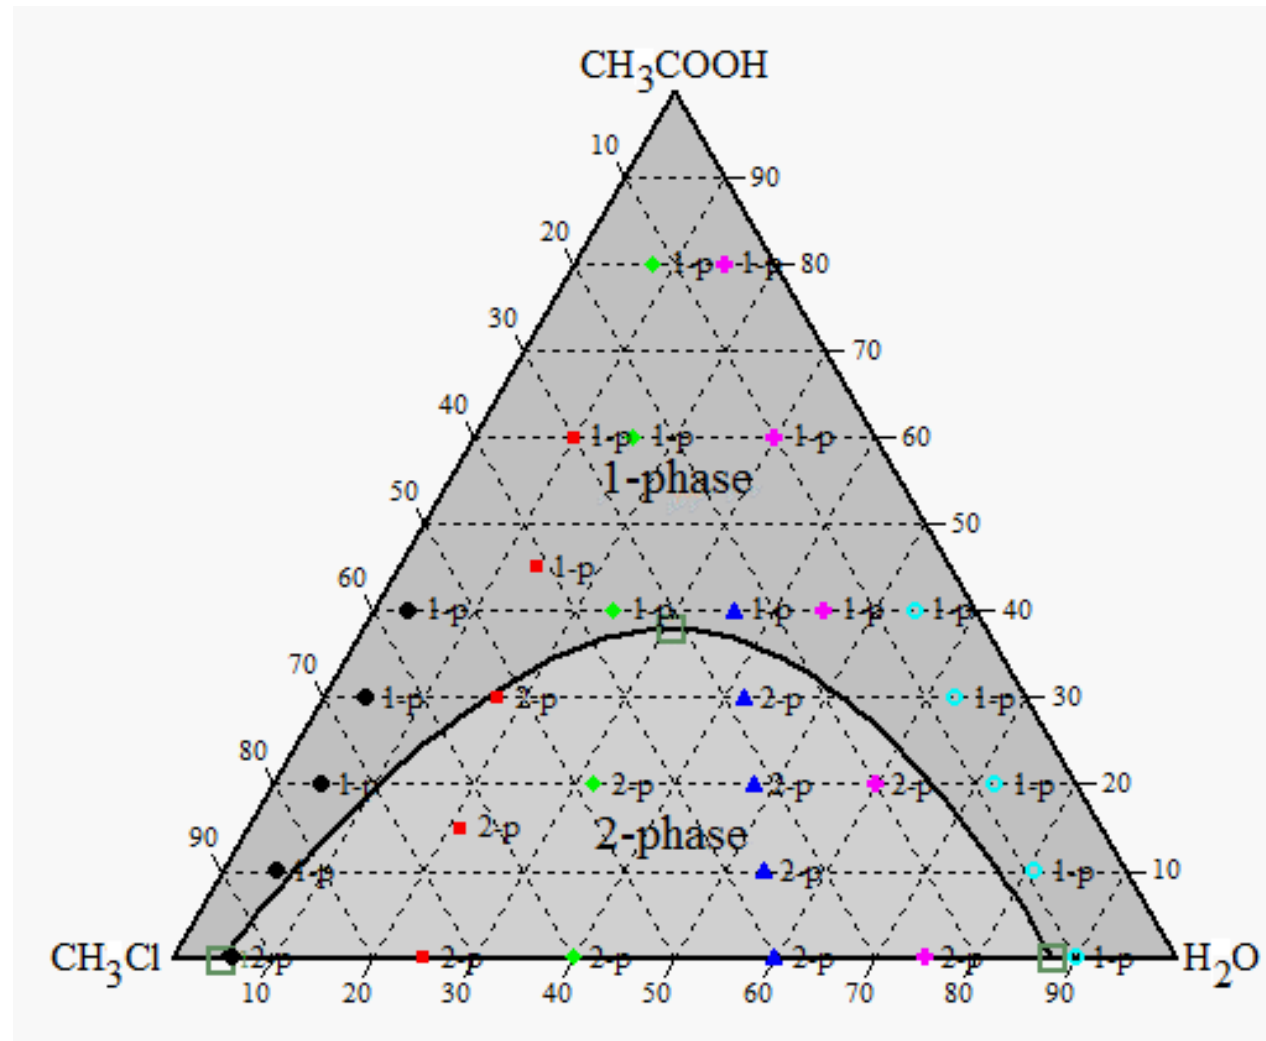


# VI. Application of the phase rule in three-component systems

22

**Triangle phase diagrams:** no  $p$  or  $T$  axis, all 3 axes are for composition.

Experimental information is essential.

Only valid at the given  $p$  and  $T$ .

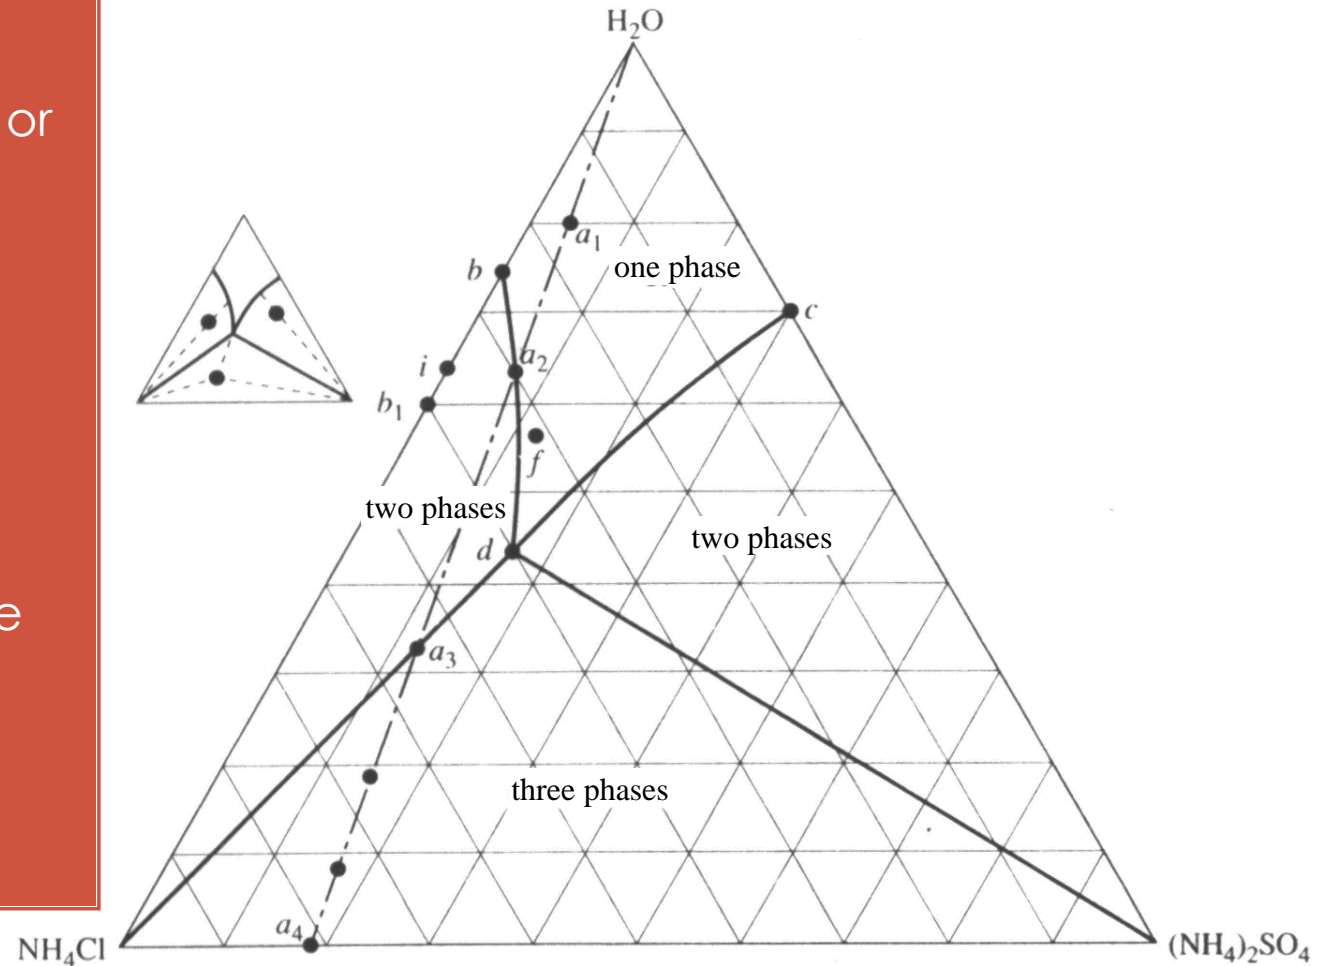

# VI. Application of the phase rule in three-component systems

23

**Triangle phase diagrams:** no  $p$  or  $T$  axis, all 3 axes are for composition.

Experimental information is essential.

Only valid at the given  $p$  and  $T$ .

